



Cable ID: PPS6-0024-B/PPS6-0024-S

Test Summary: PASS


Date / Time: 11/01/2018 03:11:00pm
Headroom: 5.2 dB (NEXT 36-45)
Test Limit: TIA Cat 6 Perm. Link
Cable Type: Cat 6 FTP

Operator: LANBERG
Software Version: 2.5200
Limits Version: 1.7000
NVP: 70.0%

Model: DTX-1800
Main S/N: 1314035
Remote S/N: 1314036
Main Adapter: DTX-PLA002
Remote Adapter: DTX-PLA002

Wire Map (T568B)


PASS





249 ft





Length (ft), Limit 295	[Pair 78]	249
Prop. Delay (ns), Limit 498		385
Delay Skew (ns), Limit 44		24
Resistance (ohms)	[Pair 36]	11.0
Insertion Loss Margin (dB)	[Pair 12]	6.6
Frequency (MHz)	[Pair 12]	250.0
Limit (dB)	[Pair 12]	31.1

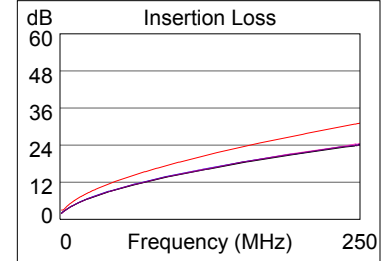



	Worst Case Margin		Worst Case Value	
PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	36-45	36-45	12-36
NEXT (dB)	5.2	6.9	5.2	7.3
Freq. (MHz)	231.5	219.5	231.5	234.5
Limit (dB)	35.9	36.3	35.9	35.8
Worst Pair	36	36	36	36
PS NEXT (dB)	5.1	6.8	5.1	6.8
Freq. (MHz)	233.5	244.5	233.5	244.5
Limit (dB)	33.2	32.9	33.2	32.9

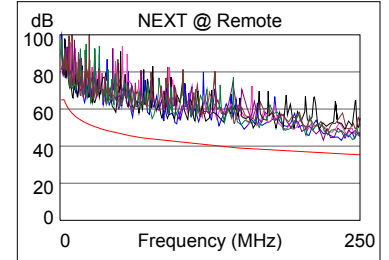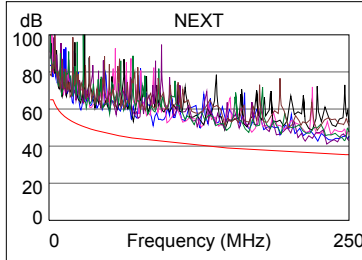



PASS	MAIN	SR	MAIN	SR
Worst Pair	45-36	36-45	12-78	78-12
ACR-F (dB)	3.1	3.4	6.4	6.0
Freq. (MHz)	166.0	166.0	249.5	249.5
Limit (dB)	19.8	19.8	16.2	16.2
Worst Pair	36	45	36	12
PS ACR-F (dB)	5.7	5.9	8.1	9.2
Freq. (MHz)	166.0	166.0	239.5	249.5
Limit (dB)	16.8	16.8	13.6	13.2

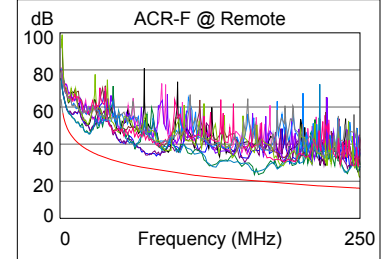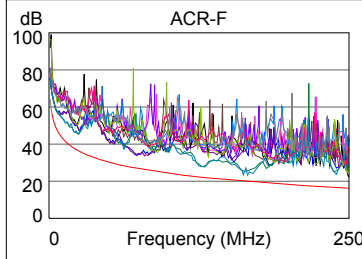

N/A	MAIN	SR	MAIN	SR
Worst Pair	12-36	12-78	36-45	12-36
ACR-N (dB)	10.3	9.8	11.9	13.7
Freq. (MHz)	26.5	10.6	232.0	234.5
Limit (dB)	42.0	51.7	6.1	5.8
Worst Pair	78	78	36	36
PS ACR-N (dB)	10.4	10.8	12.3	13.4
Freq. (MHz)	10.6	10.5	243.0	244.5
Limit (dB)	49.3	49.5	2.3	2.2

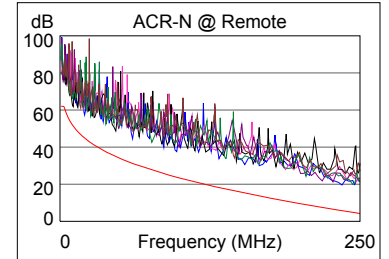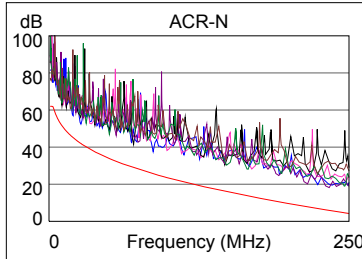

PASS	MAIN	SR	MAIN	SR
Worst Pair	78	78	78	78
RL (dB)	3.3	2.8	3.5	3.4
Freq. (MHz)	42.3	73.0	138.0	132.5
Limit (dB)	17.7	15.4	12.6	12.8

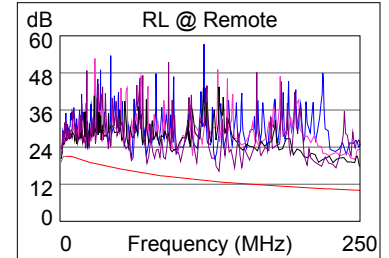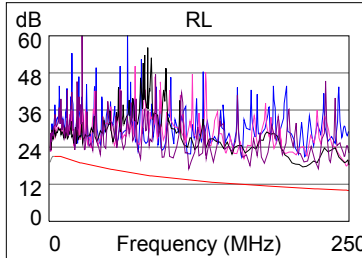

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	ATM-25	ATM-51
ATM-155	100VG-AnyLAN	TR-4
TR-16 Active	TR-16 Passive	