


PCF6-20CC-0100-W **PATCH CABLE** CAT.6

HD-PE INSULATION

ALUMINUM FOIL SHIELDING

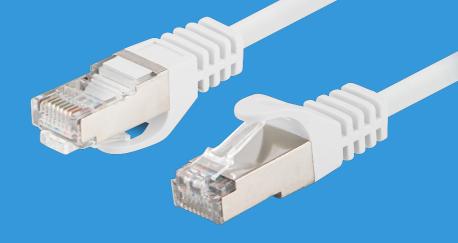

PRODUCT FEATURES:

- F/UTP shielding type Aluminum foil shield on wire
- Category compliance confirmed by Fluke tester
 - Stranded wires made from CCA

PRODUCT SPECIFICATION:

Cable length	100 cm
ICT category	Cat. 6
Shielding type	F/UTP
Colour	White
AWG	26
Coating	PVC
External lagging	5,7 mm
Maximum operating frequency	up to 250 MHz
Material	Copper plated (CCA)



EAN-13: 5901969436266 CAT. NO: PCF6-20CC-0100-W

Bulk packaging: Box • 38 cm x 28 cm x 38 cm • 11,196 kg • 30 pcs.

Despite all efforts, the manufacturer / distributor / seller does not guarantee that the published technical data, photos and descriptions do not contain any deficiencies or mistakes. The above catalogue is for information purposes and does not constitute an offer within the meaning of the Civil Code.

LD-PE CROSS CONDUCTOR DRAIN WIRE

The Association of the Associati	DO A TOTAL	in the second
and a second sec	C. C. CONTRACT	in the second
1	1. (2019)	

MYLAR FOIL

JACKET